



Crating Notification

Your purchase order includes product that needs to be crated. The following pages are provided to you, pre-delivery, so that you can forward to your warehouse to ensure that proper planning, handling and receiving of these crates occur.

The crates are designed for easy access for visual inspection and are completely re-useable.

Our carrier calls to set up the delivery appointment with your warehouse. At that time, they will confirm the quantity of crates that will be shipping to you and this will allow your warehouse to be staffed and prepared.

Our drivers will not leave without proper inspection unless your warehouse does not follow these instructions. If this occurs, it voids any claim you may submit for damage or concealed damage. This will be noted on the P.O.D.

Prismatique Customer Service is at 1.888.414.7333

09.05.17 (rev)



1) All crates are A-frame design. Two-sided for multi-section tables and one-sided (shown) for single top tables.



2) Side panels are easily removed and reused. Side panels are held in place with 12-15 wood screws easily removed and reinserted. Internal packaging is minimal for quick and complete visual inspection.



3) This label is attached to every crate. Failure to open crate side panels will be noted on the drivers POD and no future concealed damage claim will be accepted.




4a) Internal crate packaging is minimal to allow for quick inspection (note: not shown – $\frac{3}{4}$ " loose foam panel in front of stone top). FOR STONE TOPS – a temporary plywood bottom board keeps the top elevated and off the crate bottom. This support board is for transport and handling and should be removed only after stone top is in tabletop position.



4b) FOR PAINTED BACK GLASS TOPS – corrugated edge protection is used around the entire top perimeter. Surface is wrapped in light foam paper with an outer layer of bubble wrap taped to the corrugated edge



5) Each top includes two labels – a handling instruction label and a label noting the importance of leveling all table bases prior to table top placement.

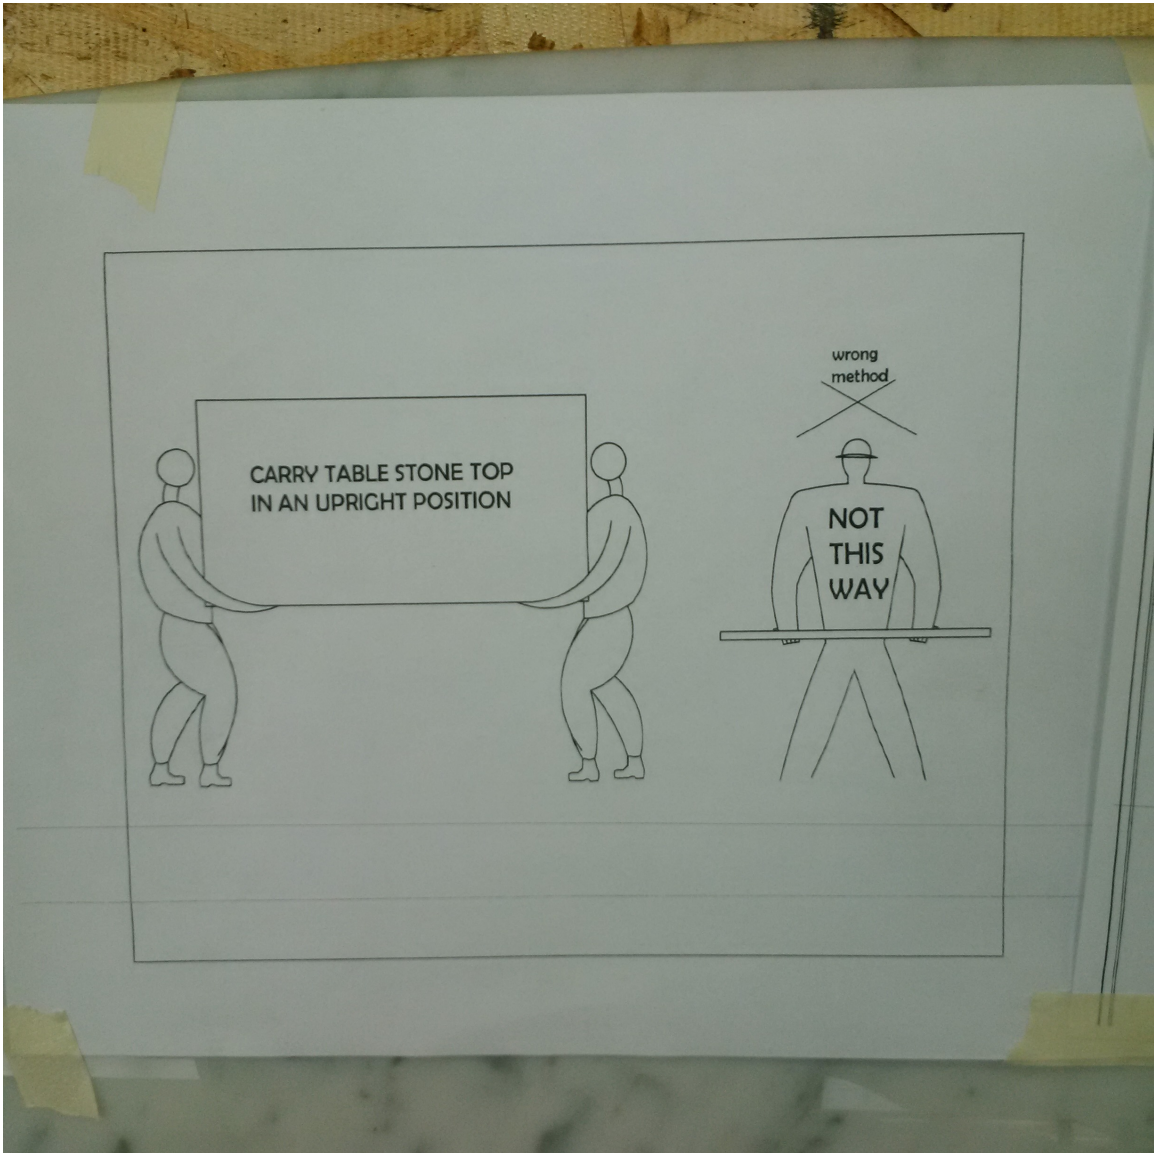

6) "A"

ATTN: INSTALLER,

***PLEASE ENSURE THAT
BASE MUST BE LEVEL (100%)
BEFORE MOUNTING MARBLE TOPS.
OTHERWISE, MARBLE MAY CRACK.***

Prismatique Designs Ltd.

7) "B"